

PROFILATI 41/21





SUPPLY

Double profiles (41 base system) are joined by riveting.

Profiles are available in 3 m or 6 m lengths. Profiles with a length of 2 m or cut to size are available upon request.

INSTALLATION

If required, double profiles can be assembled directly on-site by joining two single profiles:

with slot type 2: use M8 x 16 bolts
with slot types 3 and 4: use the KL 1 coupling clamp

Attention: profiles must be fixed together every 250 mm, including at the ends.

All profiles with a 41 base are serrated on the inside and are compatible with products from our range: HZ hammer nuts, WBD support plates, TCS 1 clamps, Pressix 41, etc.

TECHNICAL DATA

Material: steel version 1.0350 (ST 37.2), hot-dip galvanized using the Sendzimir process according to DIN EN 10327.

Load data for profiles


PROFILE 41/21/2,0


PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

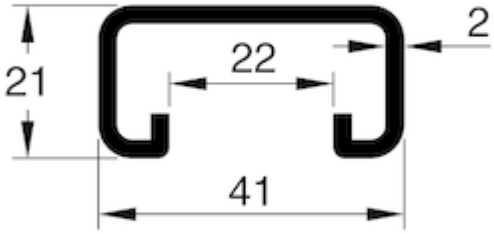

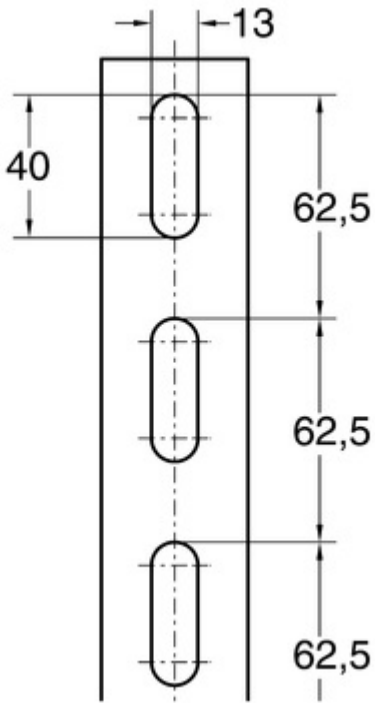


PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351


P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

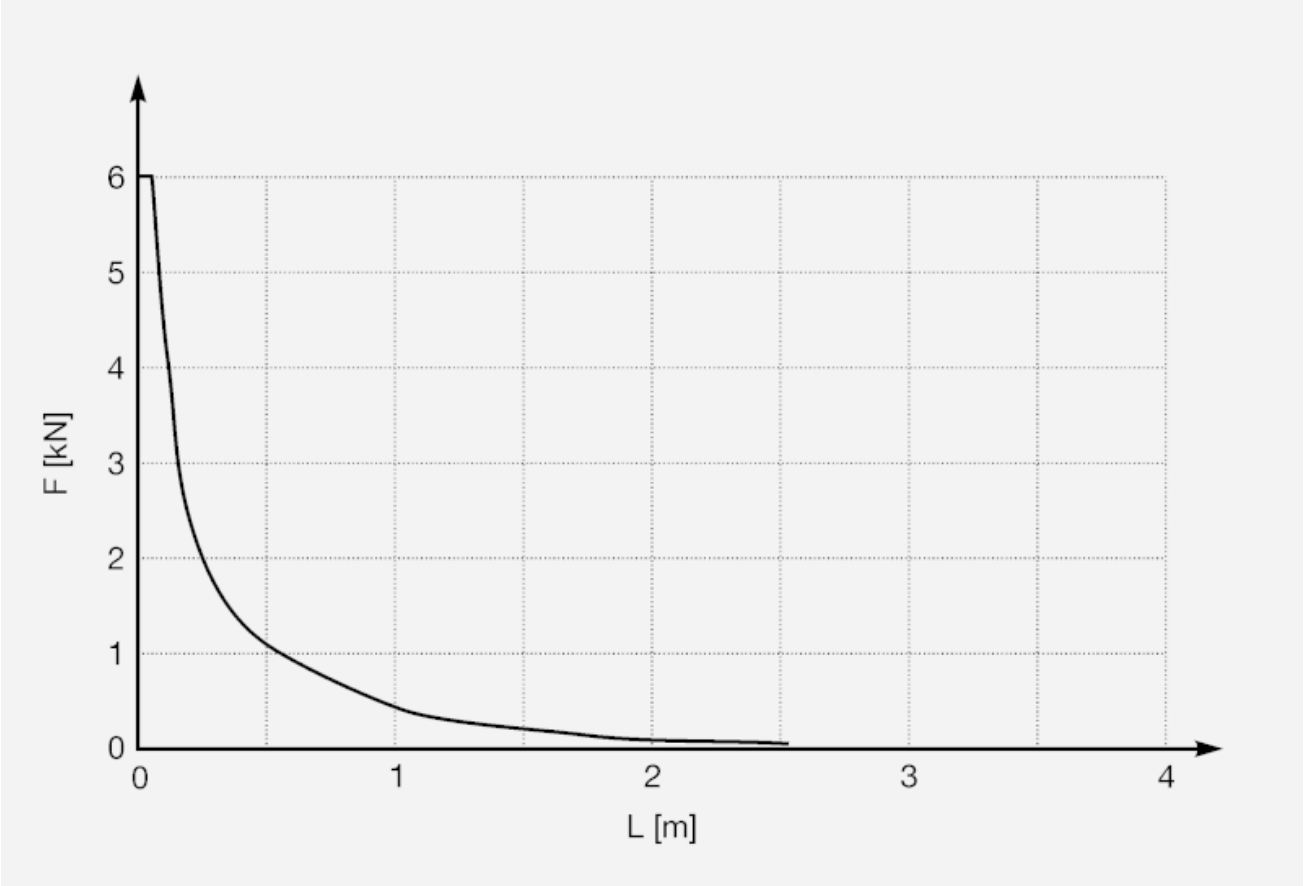

The self-weight of slots and channels has been taken into account.

σ max ≤ 160 N / mm2
f ≤ L / 200

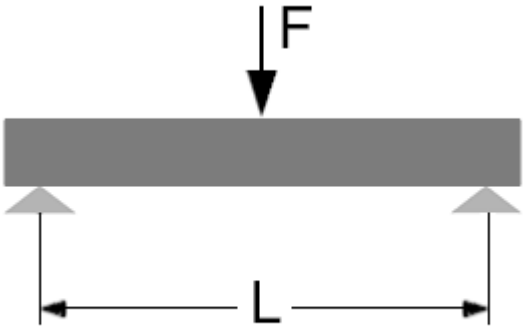



PROFILE 41/21/2,0D

PROSYSTEM ITALIA SRL
Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219


info@prosystemitalia.com
prosystemitalia.com

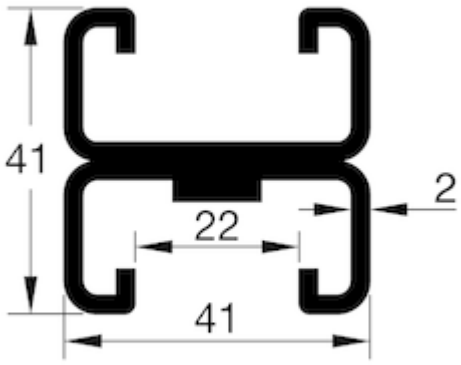

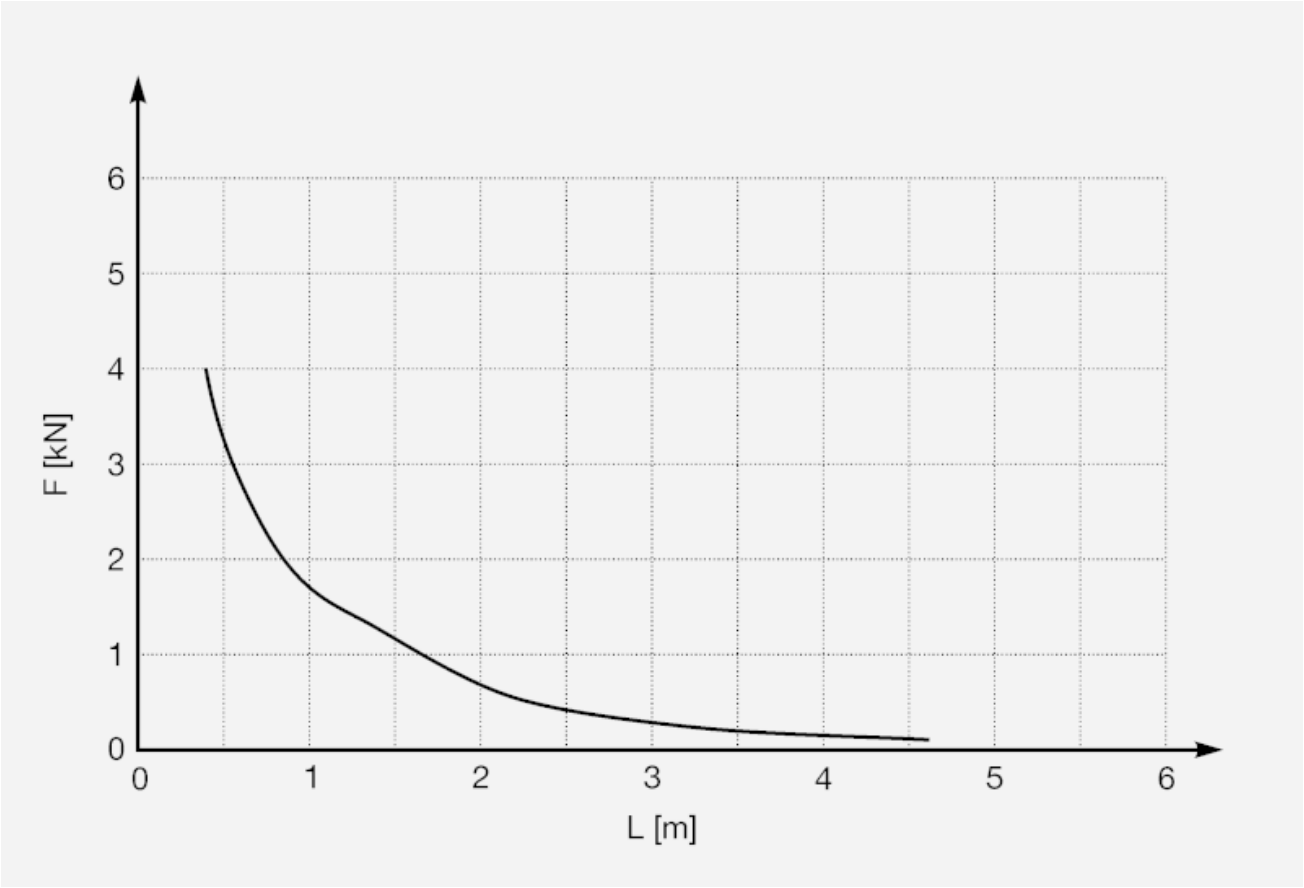

The self-weight of slots and channels has been taken into account.

σ max ≤ 160 N / mm2
f ≤ L / 200

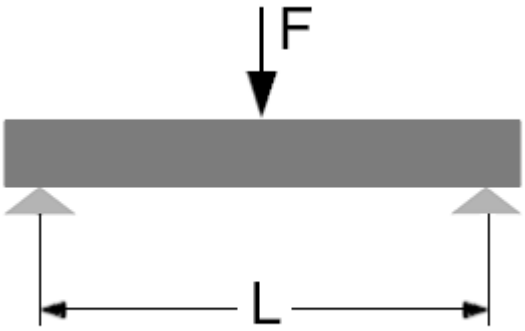

Codice	Nome	Peso	Numero di pezzi
173837C	PROFILATO 41/21/1,50 - 2 MT	1.15	100
178202C	PROFILATO 41/21/1,50 - 3 MT	1.04	150
193670C	PROFILATO 41/21/1,80 - 2 MT	1.28	150
193671C	PROFILATO 41/21/1,80 - 3 MT	1.28	150
193686C	PROFILATO 41/21/2,00 - 2 MT	1.3	100
193693C	41/21/2,0 3 m	1.28	150
193709C	41/21/2,0 6 m	1.28	300
193712C	PROFILATO 41/21/2,50 - 3 MT	1.85	150
193714C	PROFILATO 41/21/2,50 - 6 MT	1.85	300
193815C	PROFILATO 41/21/2,00 - 6 MT DOPPIO	3.94	120
193811C	PROFILATO 41/21/2,00 - 3 MT DOPPIO	3.94	120