


PERFORATED STRAP

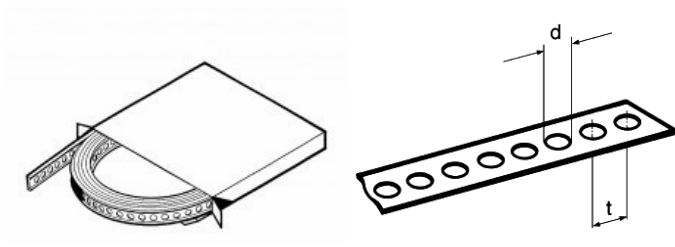

APPLICATION

For suspension of pipes, without precise dimensions. For installations without special mounting requirements. The plastic type is particularly suitable for damp locations and for the support of copper pipes.

TECHNICAL DATA

Max adm. load:

- 17 mm: 0,5 kN

- 19 mm: 0,5 kN

Working temperature:

- Galvanized type: up to + 250°C

- Plasticized type: - 40°C up to + 95°C

Codice	Nome	Peso	Numero di pezzi
120874	17×6,4 mm zincata	0.89	1
120883	26×1,0 mm zincata	1.8	1
121015	19×7,0 mm plastificata	0.97	1

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com