


BLOCK PBH 41

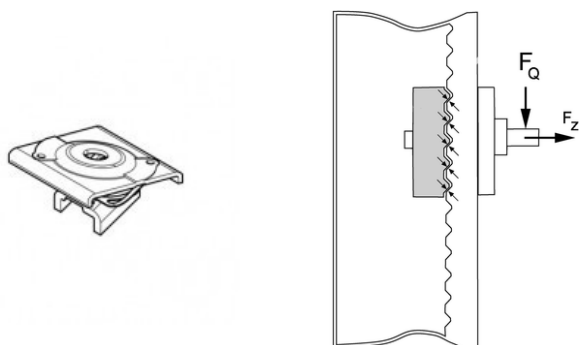

APPLICATION

Quick-installation element for efficiently mounting pipe clamps and other components to all Channels of the 41 series, suitable for double channels also.

Time saving due to pre-assembled block - replaces 2 individual parts.

Due to the force of the integrated spring, self-supporting if used for vertical channels; can however still be easily moved along the channel by hand.

To be combined with Pressix Rods PNS, grub screws, bolts and other threaded elements.

SCOPE OF DELIVERY

Pre-assembled.

INSTALLATION

Insert the Block into the channel; by turning the Holding Bracket by 90° to the right, the Channel Nut locks into the stop position; then tighten nut or other connecting part with torsional moment (M) of max. 40 Nm - the job is done!

TECHNICAL DATA

Material: Steel, electro-galvanised.

Min. material thickness Channel 41 [mm]	FZ * [kN]	FQ * [kN]
1.5	4.7	2.0
2.0	5.8	2.0
≥ 2.5	5.8	2.0

Perm. load FZ * under stress of fire

Min. material thickness Channel 41 [mm]	FWD 30 [N]	FWD 60 [N]	FWD 90 [N]	FWD 120 [N]
2.0	≤ 850	≤ 430	≤ 250	
≥ 2.5	≤ 1000	≤ 540	≤ 350	≤ 250

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

FZ = max. permissible tensile load

FQ = max. permissible lateral force against displacing

* The load capacity of the connecting parts used is to be considered. This applies particularly under stress of fire.

Codice	Nome	Peso	Numero di pezzi
198988	PBH41 M 8	0.05	50
198995	PBH41 M10	0.05	50
199008	PBH41 M12	0.05	50

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com