
U CLAMP RUC

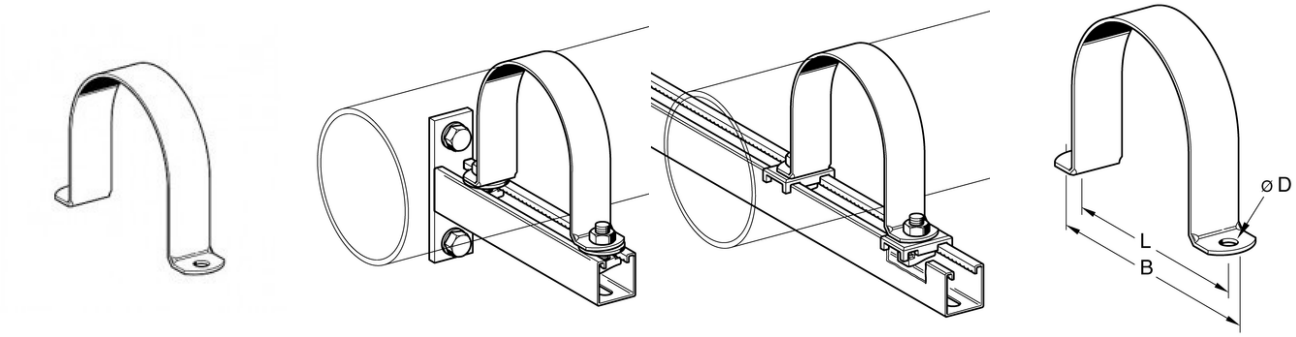

APPLICATION

For mounting pipes directly on a support, especially suitable as a replacement for U Bolts in connection with channels or cantilever brackets. When using T Bolts, their washer can be used in between the channel and the U Clamp. Dimensions and cross-sections are in keeping with the VdS standard.

TECHNICAL DATA

Material:Steel, pre-galvanised as per DIN EN 10346.

Type	For pipe	Material [mm]	B [mm]	L [mm]	ø D[mm]
18	3/8"	30 x 2.5	69	49	9
22	1/2"	30 x 2.5	73	53	9
28	3/4"	30 x 2.5	79	59	9
34	1"	30 x 2.5	85	65	9
43	1 1/4"	30 x 2.5	94	74	9
49	1 1/2"	30 x 2.5	100	80	9
61	2"	30 x 2.5	112	92	9
77	2 1/2"	30 x 2.5	128	108	9
90	3"	30 x 2.5	141	121	9
115	4"	40 x 3.0	183	155	13
141	5"	40 x 3.0	209	181	13
169	6"	40 x 3.0	236	207	13
221	8"	40 x 3.0	289	261	13
275	10"	50 x 5.0	375	325	17
326	12"	50 x 5.0	426	373	17

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Codice	Nome	Peso	Numero di pezzi
159012	18 mm 3/8''	0.09	50
159021	22 mm ½''	0.05	50
159030	28 mm ¾''	0.06	50
159049	34 mm 1''	0.07	25
159058	43 mm 1 ¼''	0.08	25
159067	49 mm 1 ½''	0.11	25
159076	61 mm 2''	0.11	25
159085	77 mm 2 ½''	0.16	25
159094	90 mm 3''	0.16	25
159100	115 mm 4''	0.31	25
159119	141 mm 5''	0.37	10
159128	169 mm 6''	0.44	10
159137	221 mm 8''	0.55	1
159146	275 mm 10''	1.43	1
159155	326 mm 12''	1.69	1