



# REFRIGERATION CLAMP LKS M



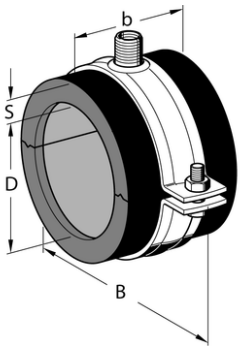

139 -168 mm



15 - 133 mm

## APPLICATION

Suitable for secure prevention of condensation water at the pipe support location of refrigeration and cold-water pipelines. An optimal diffusion-tight connection with the pipe insulation is easily and safely achieved by fixing usual insulation materials to the clamp faces using adhesive. Recommended up to -0°C at normal ambient condition.

## SCOPE OF DELIVERY

Consisting of pipe clamp and insulation insert. The one-piece insulation insert comprising two joined PUR elements forms a comprehensive connection between PUR element and pipe clamp all around the pipe.

The outer edges of the PUR elements are equipped with elastomer foam and coated by a black aluminium foil.

## TECHNICAL DATA

The unsupported lengths as listed in DIN 1988 may be applied for types LKS 13 and LKS M 19 to 168.

The regulations of DIN 4140 have to be respected (an existing gap has to be sealed with sealant). Sealant DP 30/45 see Chapter "Fixed Point Packages".

lamp material: Steel, electro-galvanised.

**PROSYSTEM ITALIA SRL**

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

**info@prosystemitalia.com**
**prosystemitalia.com**

| Type | Pipe ø D [mm | B [mm] | InsulationthicknessS [mm] | Threadconnection |
|---|---|---|---|---|
| LKS M 15 | 15.0 | 91.5 | 19.0 | M8/M10 |
| LKS M 18 | 18.0 | 99.0 | 19.5 | M8/M10 |
| LKS M 22 | 22.0 | 105.0 | 19.5 | M8/M10 |
| LKS M 25 | 25.0 | 105.0 | 19.5 | M8/M10 |
| LKS M 28 | 28.0 | 112.0 | 20.0 | M8/M10 |
| LKS M 30 | 30.0 | 112.0 | 20.0 | M8/M10 |
| LKS M 35 | 35.0 | 125.0 | 20.0 | M8/M10 |
| LKS M 38 | 38.0 | 125.0 | 21.5 | M8/M10 |
| LKS M 42 | 42.0 | 134.0 | 21.5 | M8/M10 |
| LKS M 44 | 44.5 | 134.0 | 21.5 | M8/M10 |
| LKS M 48 | 48.3 | 141.0 | 21.5 | M8/M10 |
| LKS M 54 | 54.0 | 146.5 | 21.5 | M8/M10 |
| LKS M 57 | 57.0 | 146.5 | 22.0 | M8/M10 |
| LKS M 60 | 60.3 | 151.0 | 22.0 | M8/M10 |
| LKS M 64 | 64.0 | 151.0 | 22.0 | M8/M10 |
| LKS M 70 | 70.0 | 159.5 | 22.0 | M8/M10 |
| LKS M 76 | 76.1 | 173.0 | 22.0 | M8/M10 |
| LKS M 80 | 80.0 | 173.0 | 22.0 | M8/M10 |
| LKS M 89 | 88.9 | 186.0 | 22.0 | M8/M10 |
| LKS M 102 | 101.6 | 203.0 | 22.5 | M8/M10 |
| LKS M 108 | 108.0 | 203.0 | 22.5 | M8/M10 |
| LKS M 110 | 110.0 | 203.0 | 22.5 | M8/M10 |
| LKS M 114 | 114.3 | 215.0 | 22.5 | M8/M10 |
| LKS M 133 | 133.0 | 229.0 | 23.0 | M8/M10 |
| LKS M 139 | 139.7 | 265.0 | 23.0 | M12/M16/1/2" |
| LKS M 160 | 159.0 | 276.0 | 23.0 | M12/M16/1/2" |
| LKS M 168 | 168.3 | 287.0 | 23.0 | M12/M16/1/2" |
| LKS M 180 | 180.0 | 307.0 | 25.0 | M12/M16/1/2" |
| LKS M 200 | 200.0 | 321.0 | 25.0 | M12/M16/1/2" |
| LKS M 219 | 219.0 | 344.0 | 23.0 | M12/M16/1/2" |
| LKS M 225 | 225.0 | 355.0 | 25.0 | M12/M16/1/2" |
| LKS M 250 | 250.0 | 374.0 | 25.0 | M12/M16/1/2" |
| LKS M 273 | 273.0 | 440.0 | 23.0 | M16 |

| Codice | Nome | Peso | Numero di pezzi |
|---|---|---|---|
| 114730 | | 0.08 | 42 |
| 114733 | | 0.09 | 42 |
| 114735 | | 0.1 | 42 |
| 114736 | | 0.09 | 42 |
| 114738 | | 0.1 | 36 |
| 114739 | | 0.1 | 36 |
| 114741 | | 0.17 | 24 |
| 114742 | | 0.17 | 24 |
| 114744 | | 0.18 | 24 |
| 114745 | | 0.2 | 24 |
| 114746 | | 0.2 | 18 |
| 114748 | | 0.2 | 18 |
| 114749 | | 0.22 | 18 |
| 114751 | | 0.22 | 18 |
| 114752 | | 0.22 | 18 |
| 114753 | | 0.24 | 18 |
| 114754 | | 0.3 | 18 |
| 114755 | | 0.3 | 18 |
| 114756 | | 0.3 | 10 |
| 114757 | | 0.39 | 10 |
| 114758 | | 0.4 | 10 |
| 114759 | | 0.4 | 10 |
| 114760 | | 0.41 | 8 |
| 114762 | | 0.47 | 6 |
| 114763 | | 1.19 | 6 |
| 114764 | | 1.27 | 6 |
| 114765 | | 1.29 | 6 |
| 114766 | | 1.35 | 6 |
| 114767 | | 1.44 | 6 |
| 114768 | | 1.62 | 6 |
| 114769 | | 1.64 | 6 |
| 114770 | | 1.69 | 2 |

| Codice | Nome | Peso | Numero di pezzi |
|---|---|---|---|
| 114771 | | 2.77 | 2 |