


# SLIDE SET GS F 100 2G

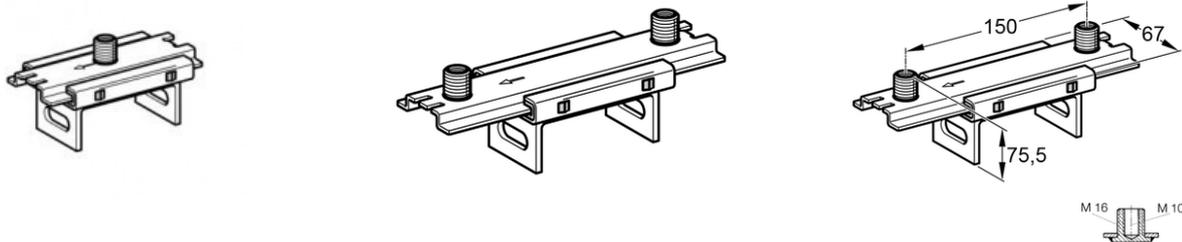

## APPLICATION

Pipe guide for twin-clamp connection designed to clutch the Beam Section F100 fixed by 2 x Self Forming Screws FLS.

## INSTALLATION

Pipe clamp connection points "2G" receive M10 studs or M16 by adapter connection.

## TECHNICAL DATA

Type	a[mm]	b[mm]	c[mm]
GS F 100 2G2	150	67	75,5



Type	Max. lever arm[mm]	Max. glide path s[mm]
GS F 100 2G2	250	135

### PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

[info@prosystemitalia.com](mailto:info@prosystemitalia.com)  
[prosystemitalia.com](http://prosystemitalia.com)

Perm. load support: 1,2 kN

Perm. load suspended: 0,6 kN

Permanent temperature range: 130°C

Static friction coefficient  $\mu_0$ : 0,20

Sliding friction coefficient  $\mu$ : 0,15

**Material:**

- Slide element: Steel, HCP;
- Slide bars: Polyamide (glass-fibre reinforced);
- Retaining plate: Steel, HCP.

Codice	Nome	Peso	Numero di pezzi
113093	GS F 100 2G2	0.79	10

**PROSYSTEM ITALIA SRL**

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

[info@prosystemitalia.com](mailto:info@prosystemitalia.com)  
[prosystemitalia.com](http://prosystemitalia.com)