


BRACKET WD F 100 140/140

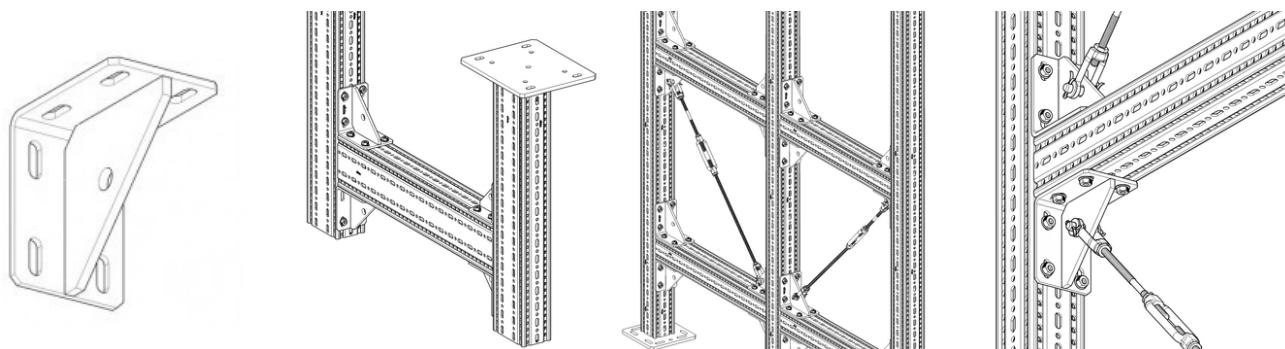

APPLICATION

Component to be used for connections between two F100 or F100/160 sections when the structural design requires an alternative to the End Support STA F 100 as the default solution.

Connections with the Corner Bracket WD F 100 allow flexible constructions and provide a high load capacity at the same time.

Using the bracket hole (\varnothing 18mm) additional bracings can be installed and comprehensive solutions can be realized.

INSTALLATION

To be used in pairs only. 8 pieces of Self Forming Screw FLS are necessary for one Corner Bracket.

TECHNICAL DATA

Type	perm. tensile load bracket hole[kN]
WD F 100 140/140	45,3

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Material: Steel, HCP.

APPROVALS

CE mark, according to EN 1090.



Codice	Nome	Peso	Numero di pezzi
113095	WD F 100	1.96	1

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com