
SLIDE SET GS 2G

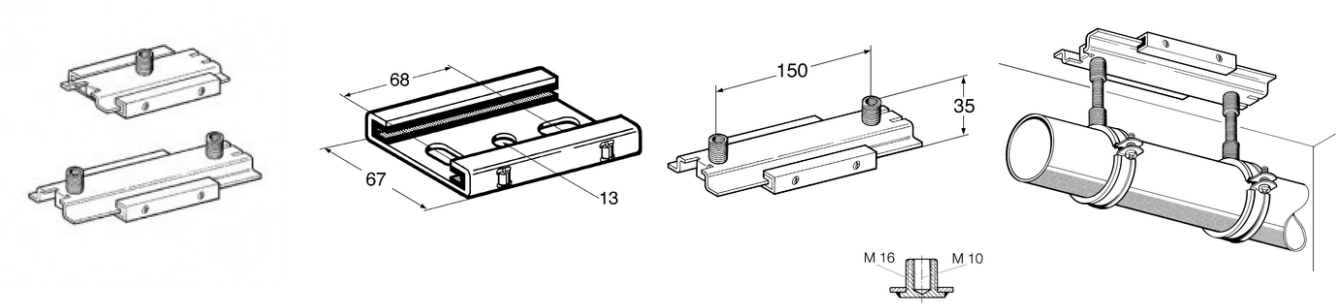

APPLICATION

Slide Set for single and double mounting of mechanical equipment. To be used preferably in combination with Pipe Clamps Ratio S and Stabil D-3G.

Various connection options with these pipe clamps ranging between M10 and R1". For adapters for these connection options (see Adapter f/f).

Sound absorption by means of glass fibre reinforced PA slide rails.

When using the version ULTRAglide the resultant shear force is halved. By this the realisation of optimized supporting structures is possible.

TECHNICAL DATA

Permissible load for ceiling mounting: 0.6 kN

Permissible load for floor mounting: 1.2 kN

Lever arm Lmax: 300 mm

Max. sliding distance Type 2G: 85 mm

Max. sliding distance Type 2G2: 140 mm

Temperature range (permanent exposure): 130°C

Version GS:

Static friction coefficient μ0: 0.18

Sliding friction coefficient μ: 0.14

Version GS ULTRAglide:

Static friction coefficient μ0: 0.07

Sliding friction coefficient μ: 0.07

Material:

- Metal components: Steel, electro-galvanised;

- Slide bar: Polyamide, glass fibre reinforced.

- Version ULTRAglide: with additional Nano coating.

Adm. load FZ * under stress of fire

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

FWD 30[N]	FWD 60[N]	FWD 90[N]	FWD 120[N]
≤ 600	≤ 430	≤ 280	≤ 200

FZ = max. adm. tensile load

* The load capacity of connecting elements used is to be respected, this applies in particular under stress of fire.

Codice	Nome	Peso	Numero di pezzi
126755	2G	0.38	25
126764	2G2	0.49	25
110582	2G Ultra glide	0.38	25
110584	2G2 Ultra glide	0.49	25