


BEAM CLIP P SS

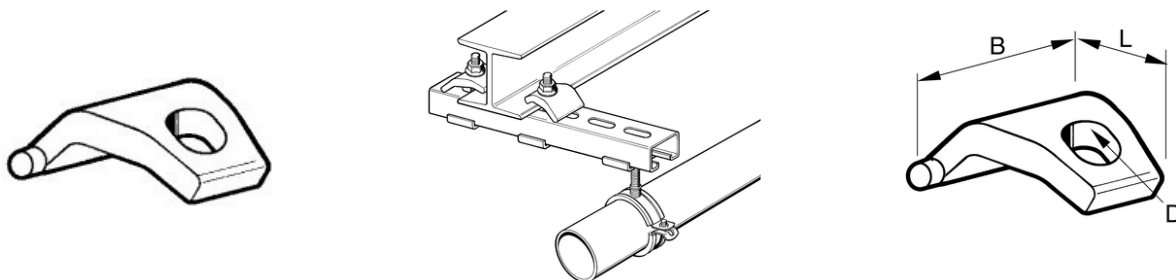

APPLICATION

Universal clamping element for bi-lateral attachment of crossbars for pipe runs, ducts, cable lines and equipment to steel beams.

The maximum clamping range may be extended by up to 10 mm by using spacers. Any thicker spacers should be welded to the crossbar.

INSTALLATION

Determination of the required length L_{min} of the pass-through bolt:

Hexagon Bolt M12 ss

Pass-through Hexagon bolt ss and Holding Bracket ss:

$$L_{min} = a + b + 43 \text{ mm}$$

Tightening torque $\pm 10\%$

P2: 85 Nm



PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

TECHNICAL DATA

Working load: 5 kN

Material: Stainless steel A4.

Type	Size range b[mm]	∅ D[mm]	L [mm]	B [mm]
P2	1 - 33	13	62	50

Codice	Nome	Peso	Numero di pezzi
163435	P2 ∅ 13 mm A4	0.23	25

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com