

SADDLE SY



APPLICATION

To be used in combination with the rollers PN and PNR. Allows the use of insulated pipes.

INSTALLATION

V-side, leaning against the pipe, flat side down in the roller support

TECHNICAL DATA

Materials:

- Saddle: Carbon Steel;
- Treatment: zinc plated (white color).
- Material: steel class 8 electro-galvanized.


Type	Diam. [mm]	Max adm. load [kN]	A [mm]	B [mm]	C [mm]	L lenght [mm]	S insulation [mm]
SY 1	0 - 80	6,0	60	25	80	200	40
SY 2	80 - 180	10,0	60	35	95	300	60
SY 3	180 - 300	15,0	92	60	125	300	80
SY 4	300 - 500	25,0	135	90	170	300	110

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

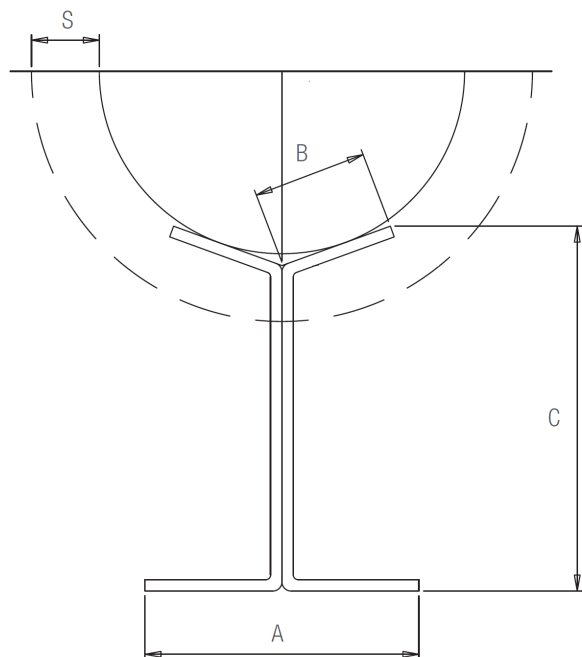

Codice	Nome	Peso	Numero di pezzi
127328	SY1 0 - 80 mm	1	1
127334	SY2 80 - 180 mm	1.85	1

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com