


SLIDE ELEMENT GLE J

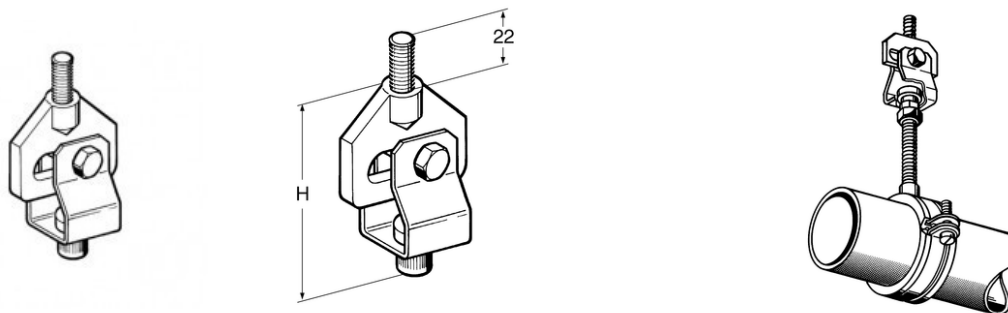

APPLICATION

Height-adjustable suspension slide element for all mechanical services.

Can be fixed as a single mounting element directly to the ceiling or, in case of parallel pipe runs, to Channels.

The slide roller located in the suspended section provides for smooth, jerk-free and silent sliding.

SCOPE OF DELIVERY

Completely pre-assembled.

INSTALLATION

The selected height is to be secured by means of a locking nut.

TECHNICAL DATA

Type	FZ * [kN]
J 8	3.5 kN
J 10	3.5 kN
J 12	6.0 kN
J 16	6.0 kN

Adm. load FZ * under stress of fire

Type	FWD 30 [N]	FWD 60 [N]	FWD 90 [N]	FWD 120 [N]
J10	≤ 1.100	≤ 600	≤ 400	≤ 300

FZ = max. adm. tensile load

* The load capacity of the connecting elements used is to be respected, this applies in particular under stress of fire.

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Maximum lateral deviation angle: 10°
 Length of drop rod of threaded rod: no limitation
 Maximum sliding distance: 25 mm
 Maximum height adjustment: 15 mm
 Static friction coefficient μ_0 : 0,23
 Sliding friction coefficient μ : 0,15
 Material: Steel/ cast iron, electro-galvanised.

Type	Threadconnection	Anchorsize	Height H [mm]
J 8	M8	M8	85
J 10	M10	M10	85
J 12	M12	M12	95
J 16	M16	M12	95

Codice	Nome	Peso	Numero di pezzi
126852	J 8	0.19	25
126861	J 10	0.19	25
126870	J 12	0.29	25
126889	J 16	0.27	25

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
 30030 Pianiga - Venezia - Italy
 T +39.041.510.1622
 F +39.041.5131351

P.IVA 03470750278
 Reg.Imp. Ve 03470750278
 Cap.soc. € 90.000,00
 REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com