
STABIL D-2G/-3G SS W/LINING

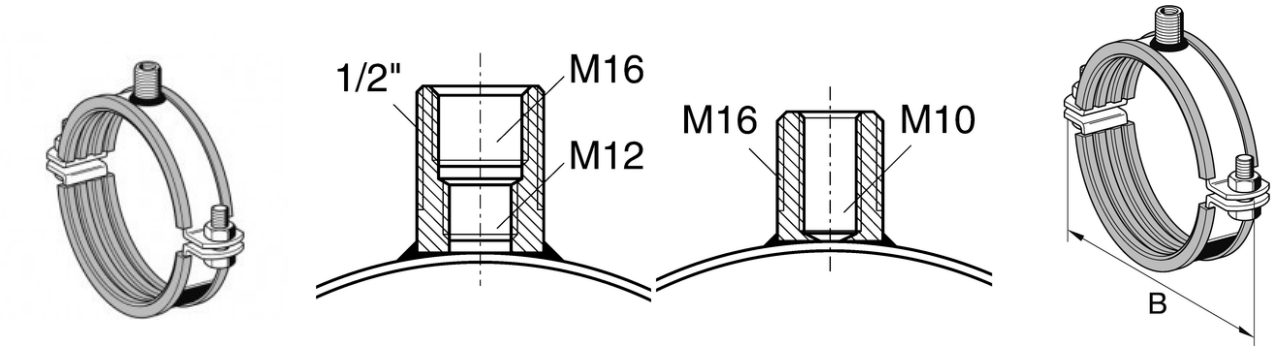

APPLICATION

For the installation of pipes required for all M&E services in industrial, residential and public buildings.

Particularly suitable for soundproof pipe installation according to DIN 4109.

SCOPE OF DELIVERY

Two-piece pipe clamp with clamping bolts and nuts (supplied loose).

INSTALLATION

Suitable for single-point mounting either directly by means of a threaded rod or by connecting to a Threaded Tube up to 1" using an adapter.

TECHNICAL DATA

Material:

- Pipe clamp: Stainless steel A4;
- Sound absorption lining: SBR/EPDM, black (see section "RUBBER PROFILE SAL SBR/EPDM" for technical data).

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Size range[mm]	Max. perm. working load [kN]	Tightening torque [Nm]	Threadconnection	MaterialW x th[mm]	B [mm]
18 - 20	1.5	3	2G	25 x 3	77
21 - 24	1.5	3	2G	25 x 3	84
25 - 29	1.5	3	2G	25 x 3	87
31 - 35	1.5	3	2G	25 x 3	95
38 - 42	1.5	3	2G	25 x 3	102
46 - 50	1.5	3	2G	25 x 3	109
51 - 55	1.5	3	2G	25 x 3	115
58 - 63	1.5	3	2G	25 x 3	123
74 - 78	2.0	5	2G	30 x 3	147
86 - 90	2.0	5	3G	30 x 3	160
100 - 106	2.0	5	3G	30 x 3	176
108 - 114	2.0	5	3G	30 x 3	184
133 - 140	4.0	10	3G	40 x 4	229
158 - 168	4.0	10	3G	40 x 4	257
198 - 207	6.0	20	3G	40 x 4	304
210 - 219	6.0	20	3G	40 x 4	316

Codice	Nome	Peso	Numero di pezzi
172703	18 - 20 mm	0.16	50
172712	21 - 24 mm ½''	0.18	50
172721	25 - 29 mm ¾''	0.19	50
172730	31 - 35 mm 1''	0.2	50
172739	38 - 42 mm 1 ¼''	0.22	50
172748	46 - 50 mm 1 ½''	0.24	50
172757	51 - 55 mm	0.25	50
172766	58 - 63 mm 2''	0.27	50
172775	74 - 78 mm 2 ½''	0.39	25
172784	86 - 90 mm 3''	0.46	25
173162	100 - 106 mm	0.49	25
172793	108 - 114 mm 4''	0.49	25
172802	133 - 140 mm 5''	1.03	10

Codice	Nome	Peso	Numero di pezzi
172811	158 - 168 mm 6''	1.14	10
172820	198 - 207 mm	1.5	10
172829	210 - 219 mm 8''	1.54	10