


FLEXBALANCE ECOPLUS C

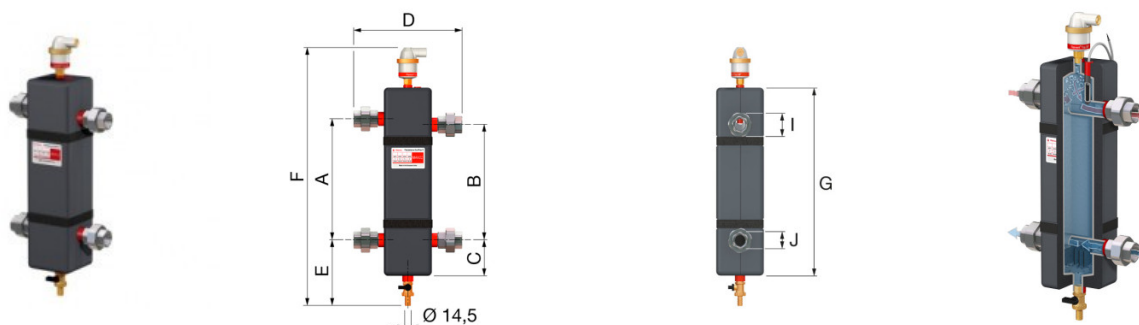

APPLICATION

The Flexbalance EcoPlus C allows hydraulic separation between the primary and secondary circuits of commercial heating and cooling systems with air and dirt separation.

SCOPE OF DELIVERY

With threaded connection

TECHNICAL DATA

Material: steel (S235JRG2): red coated RAL 3002

Min operation pressure: 0.2 bar

Max operation pressure: 10 bar

Min operation temperature -10°C

Max operation temperature 110°C

Equipped with a brass drain valve 1/2"

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Max volume glicole:50%

Maximum recommended flow velocity:2,0 m/s primary circuit

Equipped with a Flexvent Top 3/8" white

Type	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	I [mm]	J [mm]	Capacity [L]	Max power [kW]	Flow [L/s]	Kv * [m3/h](ΔP = 1 bar)
FlexBalance EcoPlus C 1	290	276	85	262	160	620	455	55	38	1,4	60	0,7	26,6
FlexBalance EcoPlus C 1 ¼	340	321	85	280	160	680	505	67	48	2,3	100	1,2	44
FlexBalance EcoPlus C 1 ½	340	320	85	320	160	680	505	74	53	3,8	140	1,6	64
FlexBalance EcoPlus C 2	400	373	95	326	170	755	585	90	65	4,5	200	2,6	104

Codice	Nome	Peso	Numero di pezzi
28377	1"	6.29	1
28378	1"1/4	8.9	1
28379	1"1/2	10.95	1
28380	2"	12.6	1

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com