
CHECK VALVE VR FM





APPLICATION

Grooved check valve, allow the flow in one direction. Once the valve is open the section is totally free.
The valves VR can be installed in horizontal or vertical position (flow upwards only).

TECHNICAL DATA

Working pressure: 24 bar
Working temperature: from -10°C to +110°C (EPDM)


NB	Ø [in]	Ø [mm]	A [mm]
50	2"	60,3	169
65	2" 1/2	76,1	183
80	3"	88,9	198
100	4"	114,3	218
125	5"	139,7	248
150	6"	168,3	270
200	8"	219,1	325

PROSYSTEM ITALIA SRL
Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

	Part	Type
1	Corpo	ghisa ASTM A 536
2	Sede	Bronzo
3	Clapet	Inox AISI 304
4	Tenuta	EPDM
5	Anello di bloccaggio	Inox AISI 304
6	Guarnizione	EPDM
7	Molla	Inox AISI 304
8	Cerniera	Inox AISI 304
9	Bullone	Inox AISI 304
10	Dado	Inox AISI 304
11	Orifizio 1/4" NPT	acciaio al carbonio
12	Orifizio 1/2" NPT	acciaio al carbonio

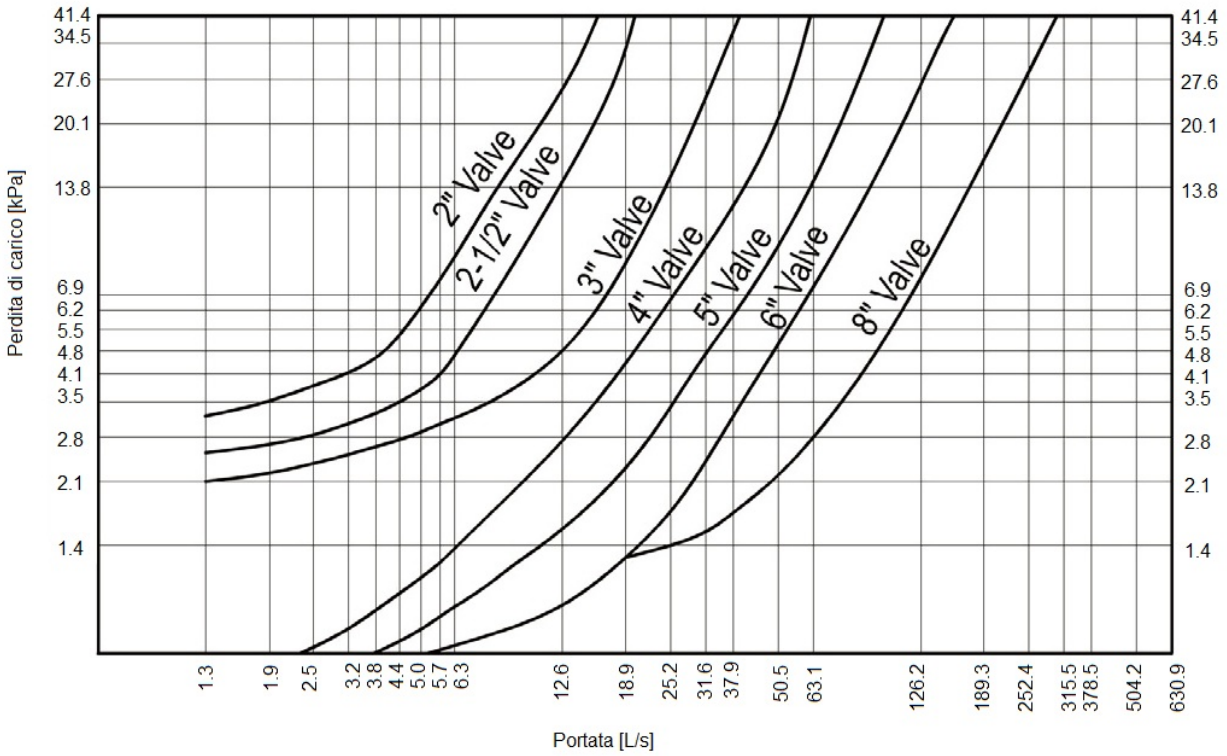

Codice	Nome	Peso	Numero di pezzi
VR060FM	60,3 mm 2''	2.5	-

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Codice	Nome	Peso	Numero di pezzi
VR076FM	76,1 mm 2''½	4	-
VR089FM	88,9 mm 3''	6	-
VR114FM	114,3 mm 4''	9	-
VR139FM	139,7 mm 5''	15	-
VR168FM	168,3 mm 6''	19	-
VR219FM	219,1 mm 8''	35	-
VR273FM	VALVOLA DI RITEGNO DN 250 - 10 - UL/FM	72	1

PROSYSTEM ITALIA SRL
Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com