


FLANGE ADAPTER 7012 PN 16

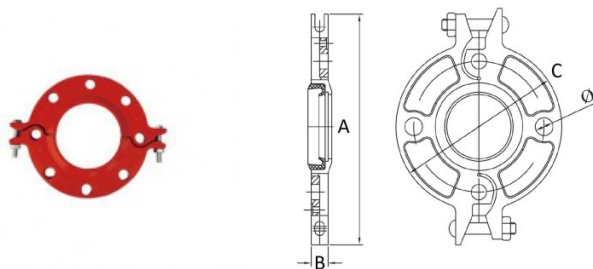

APPLICATION

Connection to flange.

TECHNICAL DATA

Working pressure: 20 bar

Working temperature: from -34°C to +110°C with EPDM

Material:

- Body: spheroidal graphite cast iron according to ASTM A536 and ISO 1083
- Surface treatment: red painted RAL 3000.
- Gasket: EPDM type E according to ISO 6182, FM 1920 and UL 213.

Bolts: tempered bolts, round head with oval neck. Heavy series nuts in carbon steel according to ASTM A183.

Type[DN]	Ø est. pipe[inch]	Ø est. pipe [mm]	A [mm]	B [mm]	C [mm]	Nr. holes	Ø holes[mm]
50	2"	60,3	220	22	165	4	18
65	2" 1/2	73,0	240	22	185	4	18
65	2" 1/2	76,1	240	22	185	4	18
80	3"	88,9	250	22	200	8	18
100	4"	114,3	278	22	220	8	18
125	5"	139,7	318	23	250	8	18
150	6"	168,3	345	23	285	8	22
200	8"	219,1	410	28	340	12	22
250	10"	273,0	500	29.5	405	12	22
300	12"	323,9	550	29.5	460	12	26

APPROVALS

FM, UL, CE and drinking water certified

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com



Codice	Nome	Peso	Numero di pezzi
7012060	60,3 mm 2"	1.4	18
7012076	76,1 mm 2"½	2.1	12
7012089	88,9 mm 3"	2.4	10
7012114	114,3 mm 4"	3.5	10
7012139	139,7 mm 5"	4.2	17
7012168	168,3 mm 6"	4.5	7
7012219	219,1 mm 8"	7.5	4
7012273	273,0 mm 10"	11	5
7012324	323,9 mm 12"	12	-

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com